

100HBL Series Specification

100HBL系列规格书

V1.0

2024/4/7

| Powerland Signatures | | | | | Customer Approval Signature |
|----------------------|---------|------|----------|-----------|-----------------------------|
| Prepared | Checked | | Approved | Marketing | |
| | ME | 研发经理 | | | |
| | | | | | |

Please return us one copy of the document with your approval signature.

请客户确认签字后回传我司此规格承认书。

Powerland Technology Inc.

南京博兰得电子科技有限公司

Building 9, No. 1 Zidan Rd., Qinhuai Dist., Nanjing, China

南京市秦淮区紫丹路设计产业园 9 号楼

Email: sales@powerlandtech.com Phone: +86-25-85582306

Features

- Adjustable constant current output
- High efficiency: 95.5% typical @230Vac, full load
- High power factor: 0.97 typical. @ 230Vac, full load
- Isolated 0-10V/PWM/Resistor Dimming optional
- Built-in potentiometer, support external potentiometer to adjust the output current
- With Lightning Protection & all-round protections (OVP,OCP,SCP,OTP)
- CE/CB/ENEC



Description

This specification describes the performance characteristics of a 100W/0.4A versatile power supply for LED Driver.

The output current of this series are adjustable, and designed for 0-10V/PWM/Resistor dimming applications.

Model Name Definition

| | | | | | | | |
|--------------------|-------------|------------------------|-------------------------|-----------------------|-------------------------|---|---------|
| 100 | HBL | 300 | C | D | (-K) | - | xxx |
| Rated Output Power | Series name | Maximum output voltage | Constant current output | Options: With dimming | Options: No micro-light | | Options |

Specifications

| Part Number | Rated Input voltage | Max. Output Power | Output Current Range | Output Voltage Range | Efficiency @230Vac | Dimming | AUX power |
|---------------|---------------------|-------------------|----------------------|----------------------|--------------------|---------|-----------|
| 100HBL300C | 200-240Vac | 100W | 0.12-0.4A | 180-300V | 95.5% | / | / |
| 100HBL300CD | 200-240Vac | 100W | 0.12-0.4A | 180-300V | 95.5% | 0-10V | 12V 200mA |
| 100HBL300CD-K | 200-240Vac | 100W | 0.12-0.4A | 180-300V | 95.5% | 0-10V | 12V 200mA |

Note: Efficiency value is typical value.

Note1(100HBL300CD/100HBL300CD-K): Programmable output current range by potentiometer or DSW pin.

Note2: -K means no micro-light during dim-to-off.

Input Specifications

| Parameter | Min. | Typ. | Max. | Notes |
|------------------------------------|---------|------------|---------|--|
| Input AC Voltage | 180 Vac | 220/230Vac | 264Vac | |
| Input Frequency | 47 Hz | 50/60 Hz | 63 Hz | |
| Leakage Current | - | - | 0.75 mA | At 240Vac / 60Hz input , grounding effectively |
| Input AC Current | - | 0.47A | - | Measured at full load and 220 Vac input. |
| Inrush Current | - | 63.4A | - | At 220Vac input, 25°C cold start. |
| Inrush Current (I ² *t) | - | 0.65 | - | A ² Sec (50%Imax to 50%Imax) |

| | | | | |
|-----|-----|---|-----|------------------------------|
| PF | 0.9 | - | - | At 200-240Vac, 60%-100% load |
| THD | - | - | 20% | At 200-240Vac, 60%-100% load |

Output Specifications

| Parameter | Min. | Typ. | Max. | Notes |
|---|-----------|------|-----------|--|
| Output Current Tolerance | -5%Io set | - | 5%Io set | At 25°C and full load condition |
| Total Output Current Ripple (pk-pk) | - | - | 10%Io max | At 25°C and full load condition, 20 MHz BW |
| Startup Overshoot Current | - | - | 10%Io max | At 25°C and full load condition |
| Line Regulation | - | - | ±3% | Measured at full load |
| Load Regulation | - | - | ±3% | |
| Turn-on Delay Time | - | - | 1s | Measured 230Vac input to 90% output current |
| Temperature Coefficient of Io set | -0.03%/°C | - | 0.03%/°C | Case temperature = 0°C ~Tc max |
| OTP Tc | 90°C | 95°C | 100°C | |
| SCP | | | | Shut down, recovers automatically after fault condition is removed |
| 12V Auxiliary Output Voltage(100HBL300CD/100HBL 300CD-K) | 11V | 12 V | 15V | |
| 12V Auxiliary Output Source Current(100HBL300CD/100HBL 300CD-K) | 0 mA | - | 200 mA | Return terminal is “Dim-“ |

General Specifications

| Parameter | Min. | Typ. | Max. | Notes |
|--|-------------------------------------|------|-------|--|
| Standby power | - | - | 0.5 W | Measured at 230Vac/50Hz; Dimming off |
| MTBF | 234,000 Hours | - | - | Measured at 230Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F) |
| Lifetime | 60000 Hours | - | - | Measured at 230Vac input, 80%Load and 75°C case temperature; See lifetime vs. Tc curve for the details |
| Operating Case Temperature Tc | -40°C | - | 90°C | Recommended power supply bottom auxiliary heat dissipation |
| Storage Temperature | -40°C | - | +85°C | Humidity: 5%RH to 90%RH |
| Dimensions: Inches (L × W × H) Millimeters (L × W × H) | 5.35*1.71*1.04in 136*43.4*26.3mm | | | |
| Net Weight/pcs | - | 240g | - | |

0-10V and PWM Dimming Specifications(100HBL300CD/100HBL300CD-K)

| Parameter | Min. | Typ. | Max. | Notes |
|--|-----------|-------|--------|---------------------------------|
| Absolute Maximum Voltage on the Vdim (+) Pin | -1 V | - | 15 V | |
| Source Current on Vdim (+)Pin | 90uA | 100uA | 110uA | |
| Dimming Output Range | 10%Io set | - | Io set | 80%Io max ≤ Io set ≤ 100%Io max |
| | 8%Io max | - | Io set | Io set < 80%Io max |
| Recommended Dimming Input Range | 0 V | - | 10 V | Default 0-10V dimming mode. |
| Dim off Voltage | 0.3 V | 0.5 V | 0.8V | |
| Dim on Voltage | 0.5V | 0.7 V | 1 V | |
| Hysteresis | - | 0.2 V | - | |
| PWM_in High Level | 9.5 V | 10V | 10.5 V | |
| PWM_in Low Level | -0.3 V | - | 0.6 V | |
| PWM_in Frequency Range | 500 Hz | - | 3 KHz | |
| PWM_in Duty Cycle | 1% | - | 98% | |
| PWM Dimming off | 3% | 5% | 8% | |
| PWM Dimming on | 5% | 7% | 9% | |

Safety & EMC Compliance

| Safety Category | Standard |
|-----------------|---|
| CE | EN61347-1 |
| EMI Standards | Notes |
| EN55015 | Class B |
| | This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired Operation. |
| EMS Standards | Notes |
| EN 61000-4-2 | Electrostatic Discharge (ESD): 8kV air discharge, 4kV contact discharge, criteria B |
| EN 61000-4-3 | Radio-Frequency Electromagnetic Field Susceptibility Test-RS, criteria A |
| EN 61000-4-4 | Electrical Fast Transient / Burst-EFT: level 3, criteria B |
| EN 61000-4-5 | Surge Immunity Test: AC Power Line: line to line 6kV, line to earth 10kV, criteria B |
| EN 61000-4-6 | Conducted Radio Frequency Disturbances Test-CS, criteria A |
| EN 61000-4-11 | Voltage Dips, criteria B |
| EN 61547 | Electromagnetic Immunity Requirements Applies To Lighting Equipment |


Note3: This LED driver meets the EMI specifications above, but EMI performance of a luminaire that contains it depends also on the other devices connected to the driver and on the fixture itself.

Isolation


| Isolation | AC Input | DC Output | Dimming (SELV) | Housing |
|----------------|------------------|------------------|------------------|---------|
| AC Input | / | No isolation | Double isolation | Basic |
| DC Output | No isolation | / | Double isolation | Basic |
| Dimming (SELV) | Double isolation | Double isolation | / | Basic |
| Housing | Basic | Basic | Basic | / |

Performance Curve


Derating Curve

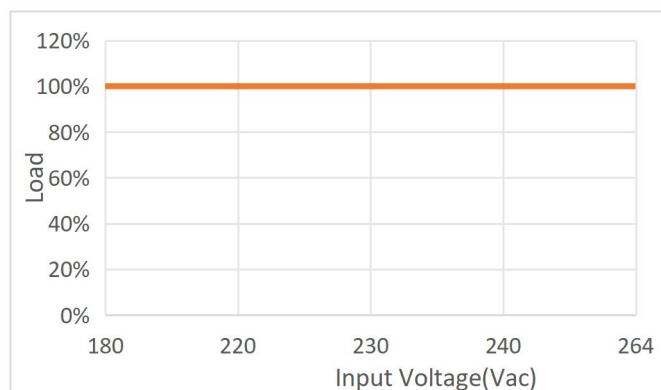


Power Factor Vs Different Loads (Vo=230V Io=0.35A)

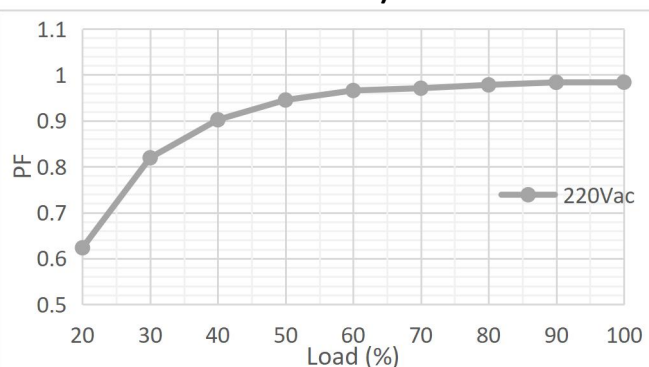


Efficiency Vs Different Loads (Vo=230V Io=0.35A)

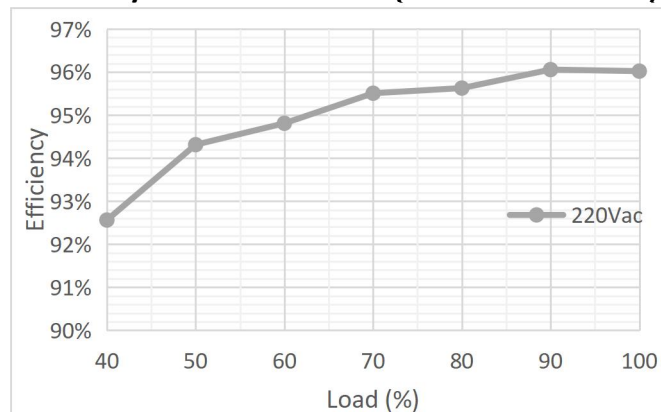


THD Vs Different Loads (Vo=230V Io=0.35A)

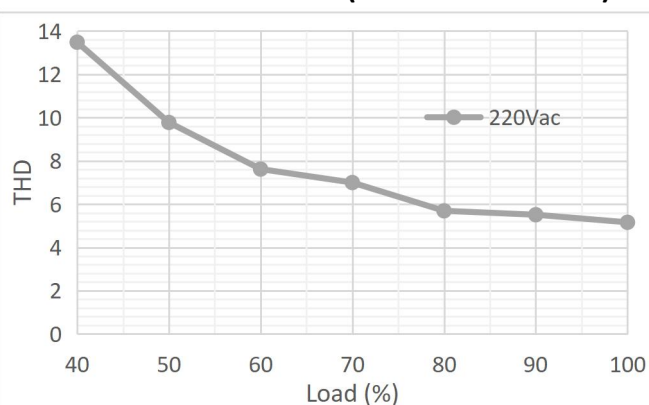



I/V Operating Area

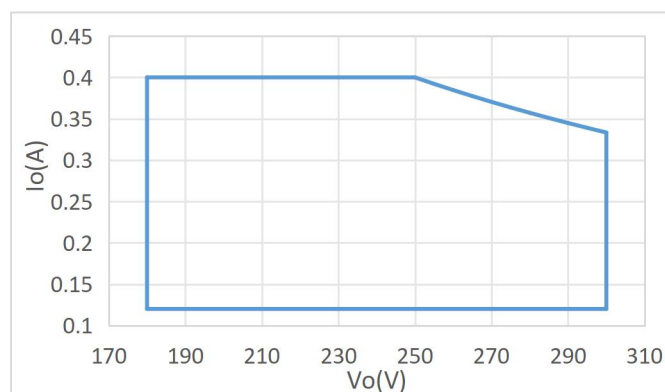

Life Vs Case Temperature


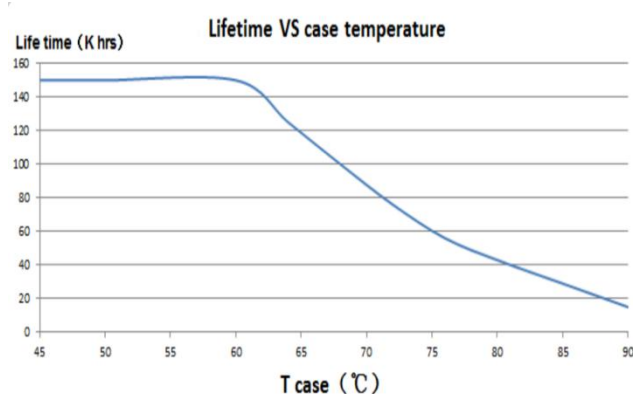


0-10V Analog Dimming & PWM Dimming(100HBL300CD/100HBL300CD-K)

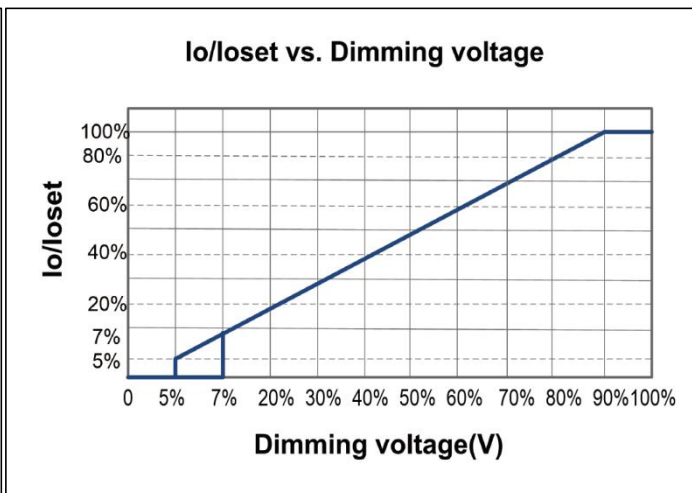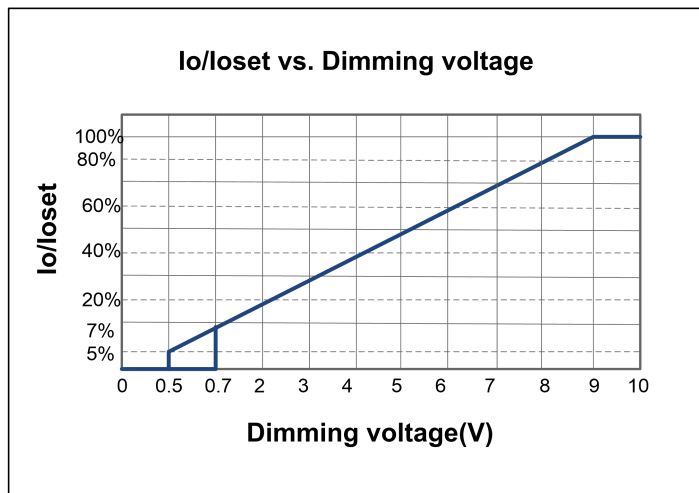


Potentiometer Or Dip-switch Program Output Current

(100HBL300CD/100HBL300CD-K)

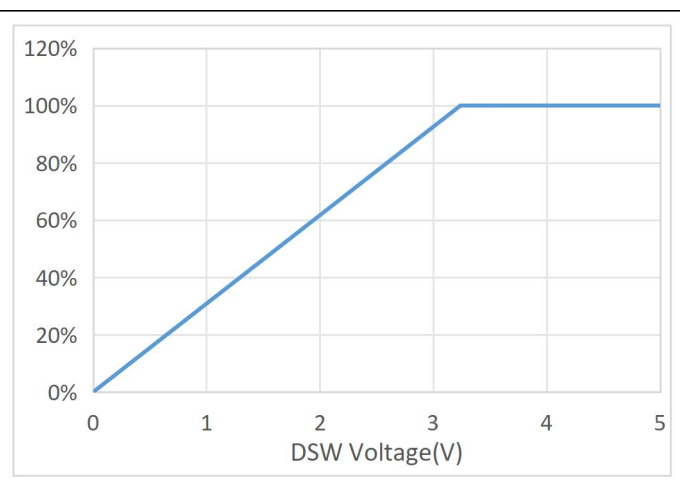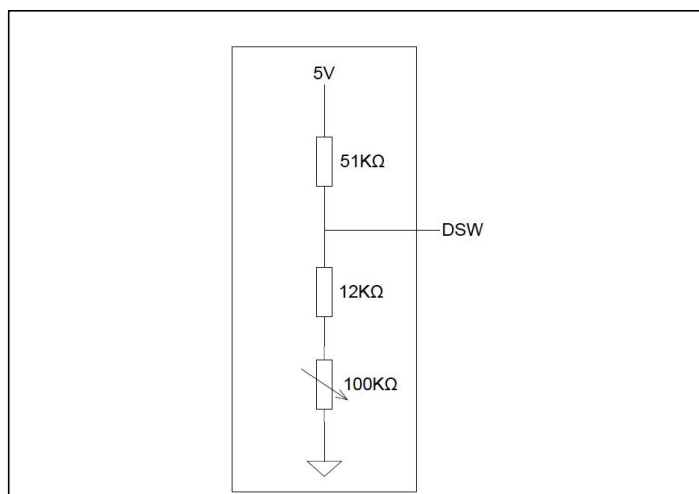

Mechanical Drawing

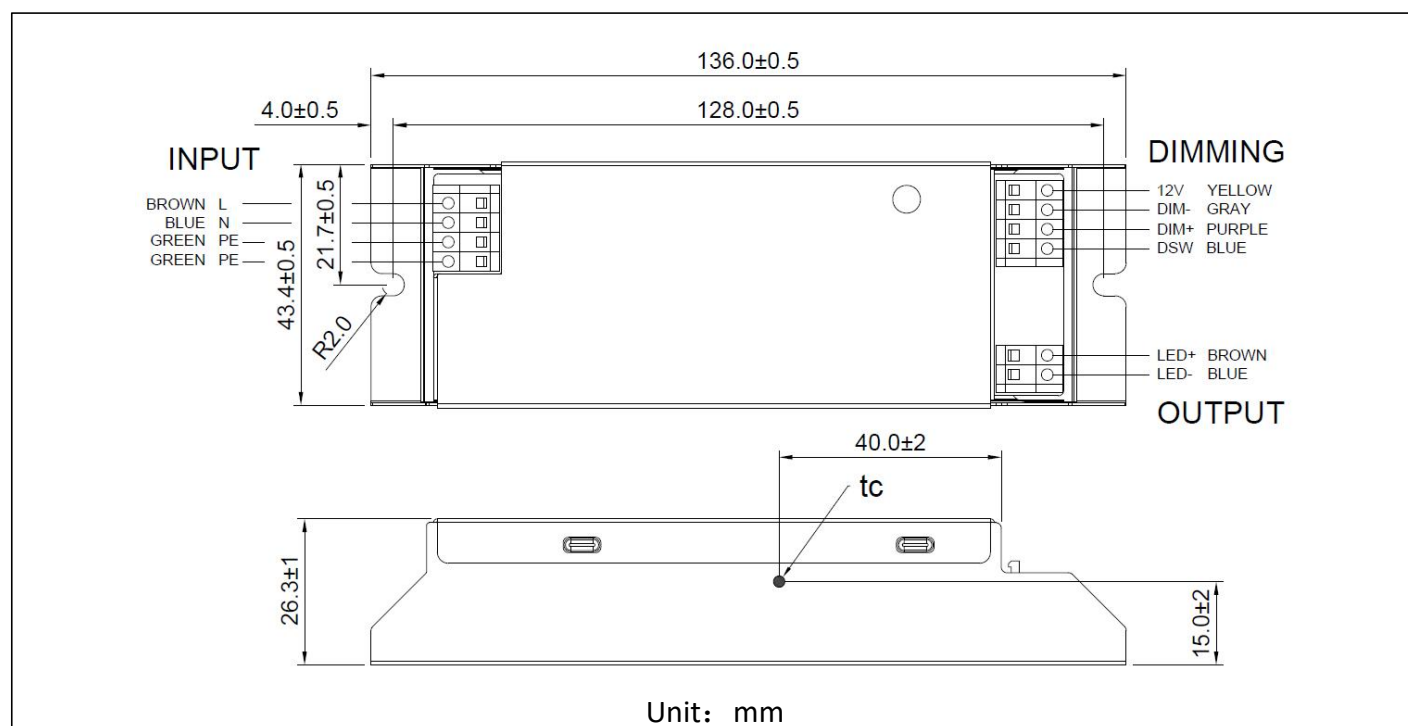

Revision History

| Change Date | Rev. | Description of Change | | |
|-------------|------|-----------------------|------|----|
| | | Item | From | To |
| 2024/4/7 | V1.0 | | | |
| | | | | |