

LED驱动规格书

800GSL系列规格书

V1.5

2023/11/7

Powerland Signatures					Customer Approval Signature
Prepared	Checked		Approved	Marketing	
	ME	研发经理			

Please return us one copy of the document with your approval signature.

请客户确认签字后回传我司此规格承认书。

Powerland Technology Inc.

南京博兰得电子科技有限公司

Building 9, No. 1 Zidan Road., Qinhuai District., Nanjing 210014, China.

江苏省南京市秦淮区紫丹路 1 号 9 栋

Email: sales@powerlandtech.com Phone: +86-25-85582306

Features

- Dimming port programming without driver power on
- CC/CV hybrid output
- High efficiency (Max 95%), active power factor correction
- Ultra low THD at light load
- Isolated 0~10V/ PWM/Rset dimming, Dim to off option
- 12V/200mA AUX Output
- UL recognized
- IP65



Description

800W LED Drivers offers digital programmable drivers with wide-range adjustable output current, together with 12V/200mA auxiliary output (optional) for smart lighting.

The output current of this series are programmable, and designed for 0-10V/PWM/Rset dimming applications.

Model Name Definition

800	GSL	56	CV	G	-	XX
Rated Output Power	Series name	Maximum output voltage	Constant current and constant voltage output	Options: Output with FG line		Options

Specifications

Part Number	Max. Output Power	Programmable Current Region@CC	Output Voltage Range	Programmable Voltage Region@CV	Efficiency @277VAC
800GSL56CVG	800W	6.67-16.67A	28-56V	48-56 V	95%
800GSL80CVG	800W	4.71-11.76A	38-80V	64-80 V	95%
800GSL140CVG	800W	2.67-6.67A	67-140V	112-140V	95%
800GSL180CVG	800W	2.11-5.26A	84-180V	140-180 V	95%
800GSL240CVG	800W	1.57-3.92A	115-240V	192-240 V	95%

Note: Efficiency value is typical value.

Suffix “-XX” Function Optional Model Table

-XX	Input Interface	Output Interface	Dimming Interface
-CJJ3	Jnicon M19 3 pins male	Jnicon M19 3 pins female	Jnicon M16 3 pins female
-CLL3	LLT M19 3 pins male	LLT M19 3 pins female	LLT M16 3 pins female
-CQQ3	Chogori Middle 3 pins male	Chogori Middle 3 pins female	Chogori 500 3 pins female
-CJJW	Jnicon M19 3 pins male	Jnicon M19 3 pins female	RJ12 6P6C *2

-CLLW	LLT M19 3 pins male	LLT M19 3 pins female	RJ12 6P6C *2
-CQQW	Chogori Middle 3 pins male	Chogori Middle 3 pins female	RJ12 6P6C *2

Notes: The output is 2 pins if without output FG line.

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input AC Voltage	90 Vac	-	305 Vac	
Input DC Voltage	127 Vdc	-	300 Vdc	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	0.75 mA	At 277Vac / 60Hz input , grounding effectively
Input AC Current	-	-	3.3A	Measured at full load and 277 Vac input.
	-	-	7.4A	Measured at full load and 120 Vac input.
Inrush Current	-	-	65A	At 220Vac input, 25°C cold start
PF	0.9	-	-	At 100-277Vac, full load
THD	-	-	20%	

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Tolerance	-5%lo set	-	5%lo set	At 25°C and full load condition
Total Output Current Ripple (pk-pk)	-	-	10%lo max	At 25°C and full load condition, 20 MHz BW
Startup Overshoot Current	-	-	20%lo max	At 25°C and full load condition
No Load Output Voltage		57		800GSL56CV(G) only
Line Regulation	-	-	±1%	Measured at full load
Load Regulation	-	-	±1%	
Turn-on Delay Time	-	0.8 s	1.5 s	Measured at 120Vac input.
Temperature Coefficient of lo set	-0.03%/°C	-	0.03%/°C	Case temperature = 0°C ~Tc max
12V Auxiliary Output Voltage	11V	12 V	15 V	
12V Auxiliary Output Source Current	0 mA	-	200 mA	Return terminal is "Dim--"
OTP Tc(Note1)	85°C	90°C	100°C	Output current will drop to 50% lowest, or shut down.
SCP				Hiccup mode, Auto recover

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Standby power	-	-	1.5 W	Measured at 220Vac/50Hz; Dimming off
MTBF	-	234000 Hours	-	Measured at 220Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK- 217F)
Lifetime	-	50000 Hours	-	Measured at 220Vac input, 80%Load and 75°C case temperature; See lifetime vs. Tc curve for the details
Operating Case Temperature Tc(Note1)	-40°C	-	90°C	

Operating Ambient Temperature Ta	-40°C	-	50°C	At 176-305Vac input, Other voltage Ta 40°C max.
Storage Temperature	-40°C	-	+85°C	Humidity: 5%RH to 100%RH
Dimensions				
Inches (L × W × H)	15.20 × 4.18 × 2.32			
Millimeters (L × W × H)	386 × 106.2 × 59			
Net Weight/pcs	-	4kg	-	

Note1: There are three points could be maximum Tc point, depending on different Vac input and Vdc output. These three points (Tc, Tc1, Tc2) position are shown in below mechanical drawing.

Dimming Specifications

Parameter	Min.	Typ.	Max.	Notes
Absolute Maximum Voltage on the Vdim (+) Pin	-1 V	-	15 V	
Source Current on Vdim (+) Pin	90 uA	100 uA	110 uA	
Dimming Output Range	10%Io set	-	Io set	80%Io max ≤ Io set ≤ 100%Io max
	8%Io max	-	Io set	Io set < 80%Io max
Recommended Dimming Input Range	0 V	-	10 V	Default 0-10V dimming mode.
Dim off Voltage	0.3 V	0.5 V	0.8V	
Dim on Voltage	0.5V	0.7 V	1 V	
Hysteresis	-	0.2 V	-	
PWM_in High Level	9.8 V	10V	10.2 V	PWM is disabled default, please inform us if need this function enable.
PWM_in Low Level	-0.3 V	-	0.6 V	
PWM_in Frequency Range	200 Hz	-	3 KHz	
PWM_in Duty Cycle	1%	-	100%	
PWM Dimming off	3%	5%	7%	
PWM Dimming on	5%	7%	9%	


Safety & EMC Compliance

Safety Category	Standard
UL/CUL	UL8750, CAN/CSA-C22.2 No. 250.13-12
EMI Standards	Notes
FCC Part 15	ANSI C63.4:2009 Class B
	This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired Operation.
EMS Standards	Notes
EN 61000-4-2	Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient / Burst-EFT: level 3, criteria A
EN 61000-4-5	Surge Immunity Test: AC Power Line: line to line 4 kV, line to earth 6 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS


EN 61000-4-8	Power Frequency Magnetic Field Test
EN 61000-4-11	Voltage Dips
EN 61547	Electromagnetic Immunity Requirements Applies To Lighting Equipment

Performance Curve


Input Voltage Derating Curve

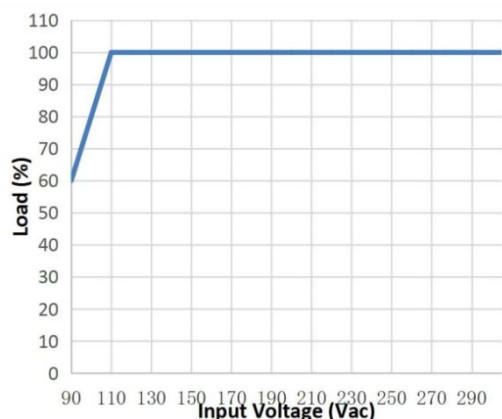


Total Harmonics Vs Different Loads

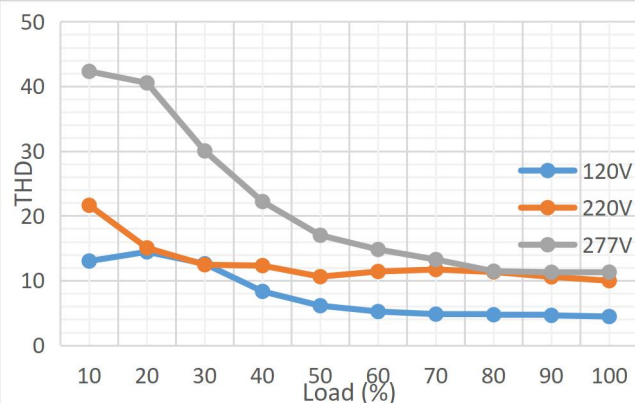


Efficiency Vs Different Loads

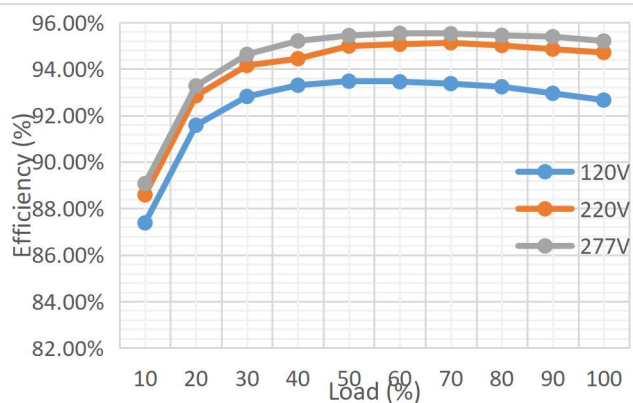





Power Factor Vs Different Loads

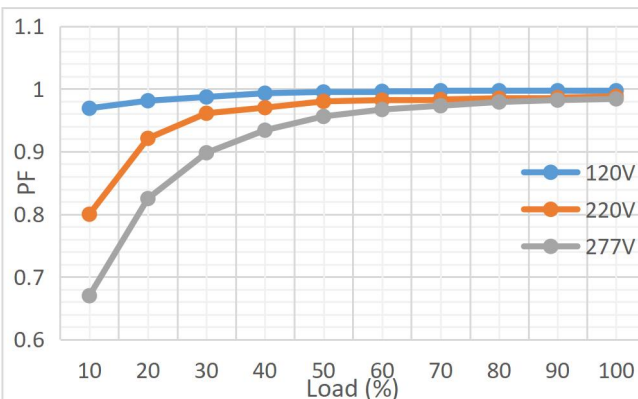


Life Vs Shell Temperature

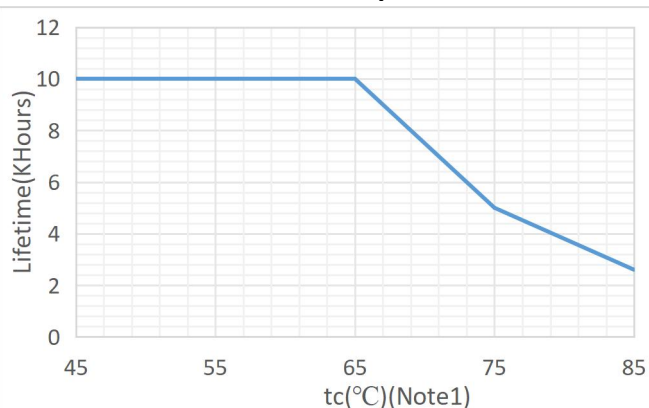

0-10V Analog Dimming & PWM Dimming

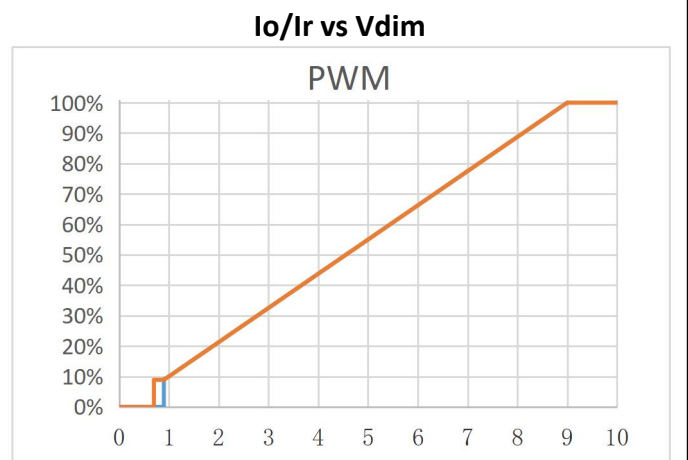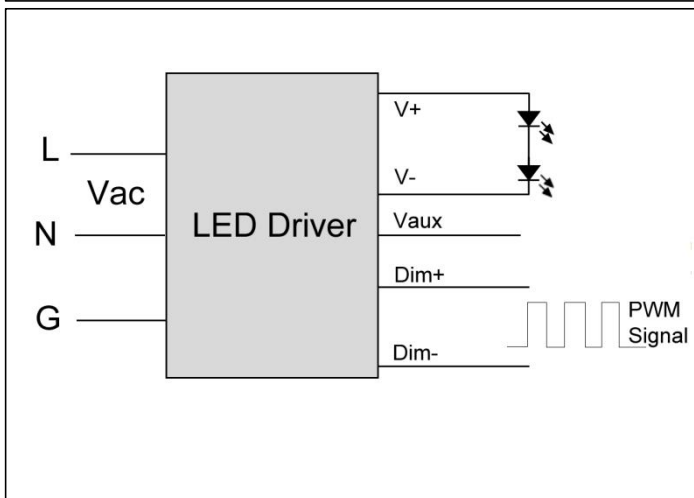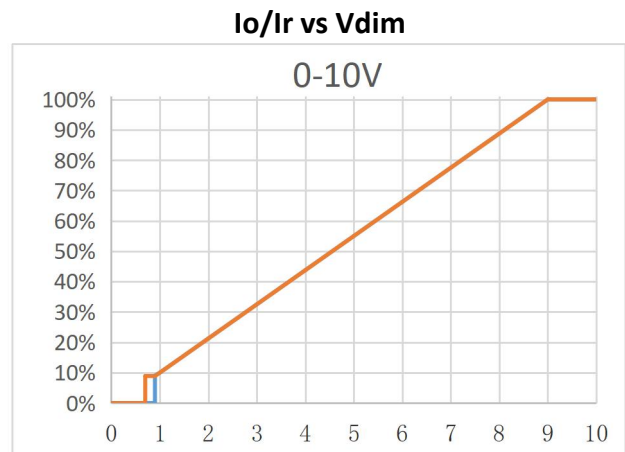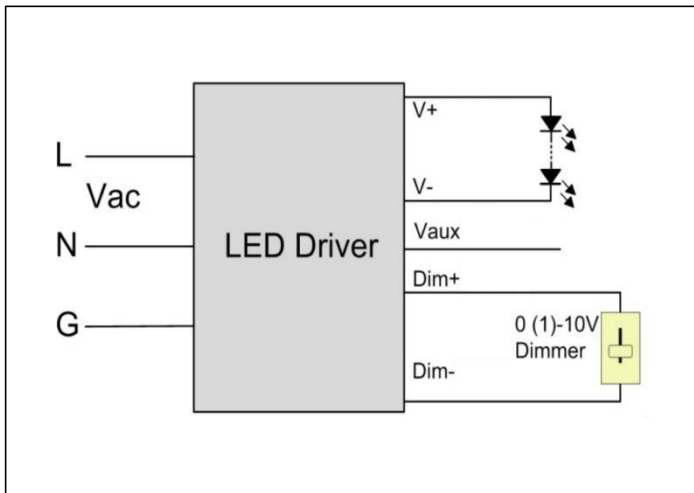


Programming wiring diagram

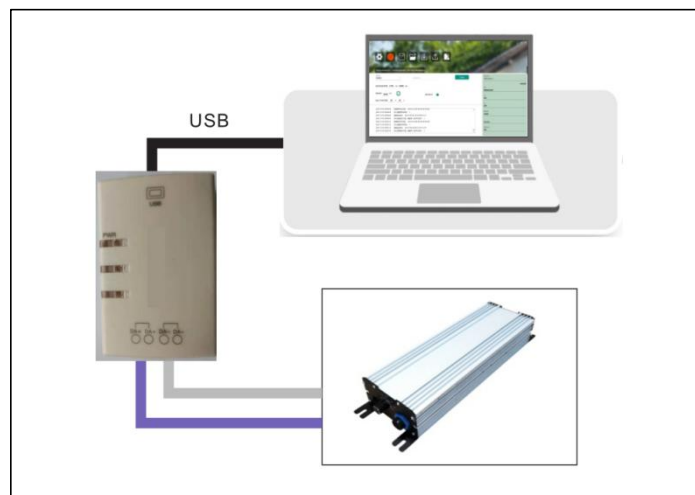


Mechanical Specification


-CJJ3/-CLL3/-CQQ3/-CJJW/-CLLW/-CQQW Model Mechanical Drawing



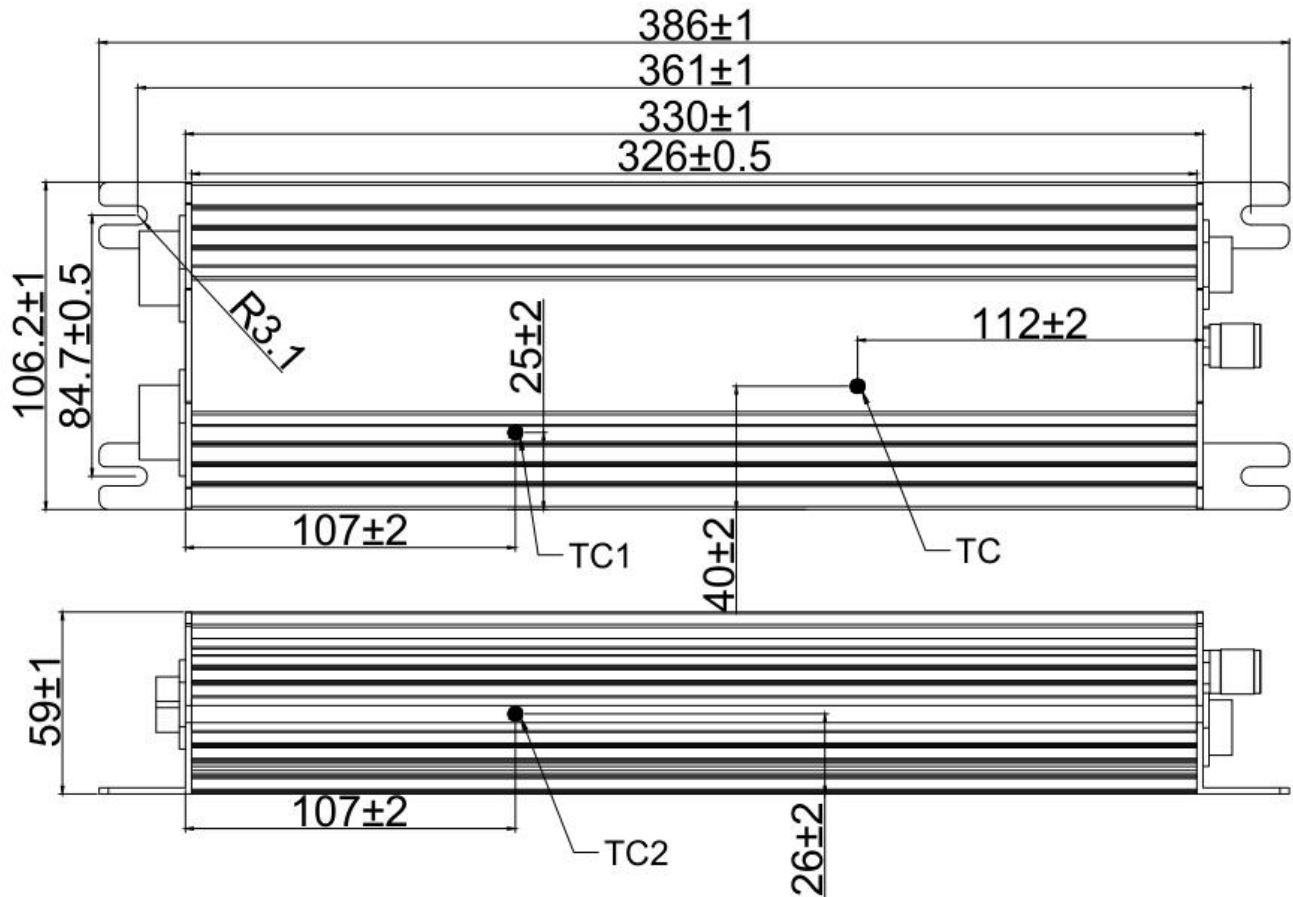


-CJJ3/-CLL3 End Cap

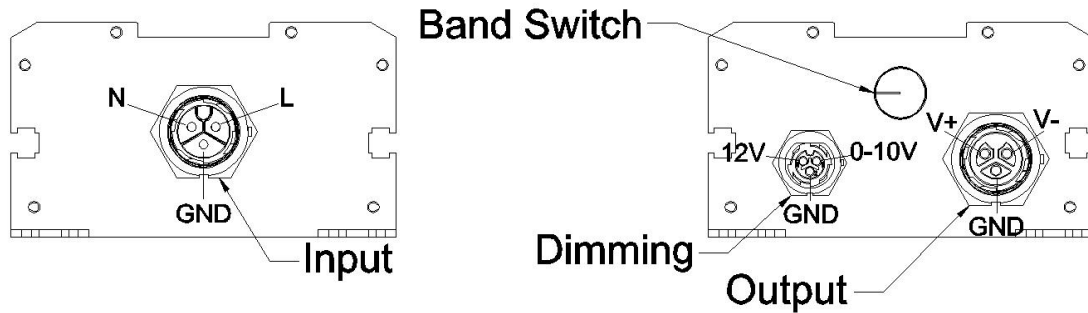


-CQQ3 End Cap

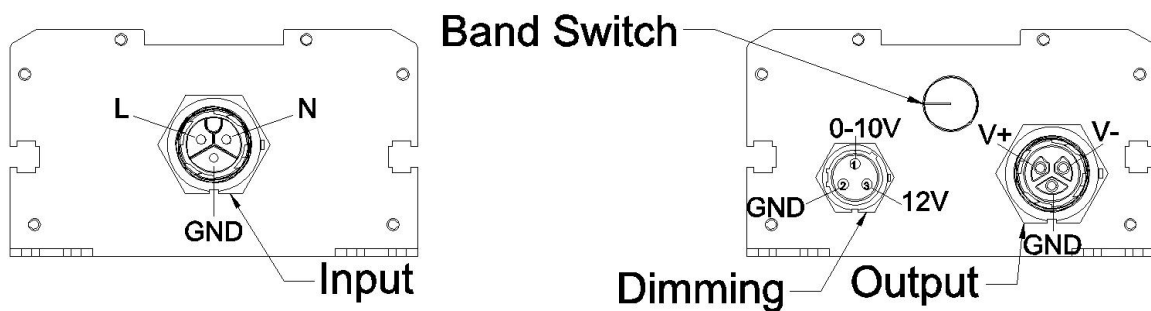

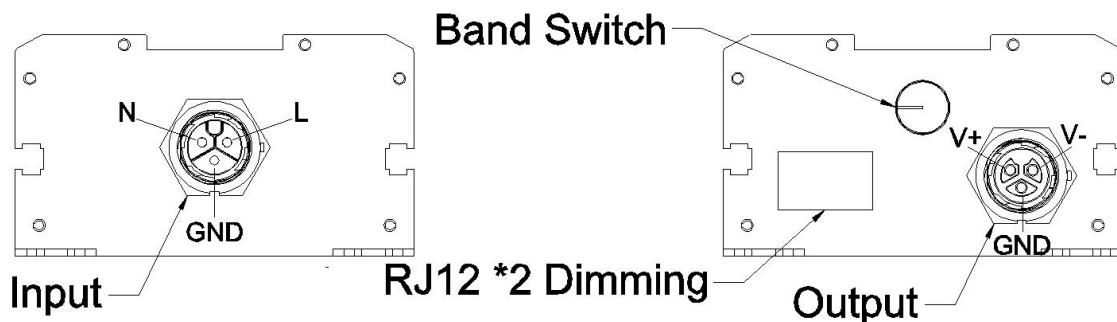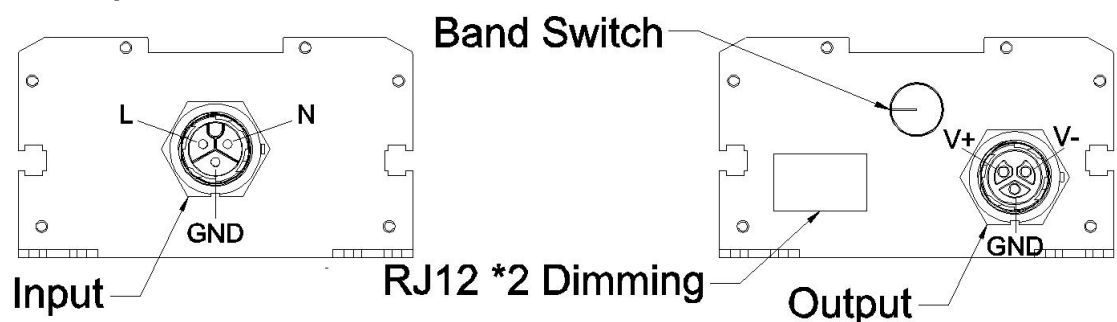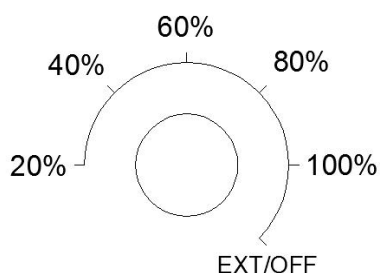-CJJW/-CLLW End Cap

-CQQW End Cap

**-CJJ3/-CLL3/-CQQ3/-CJJW/-CLLW/-CQQW
Model Knob Switch Screen Printing**

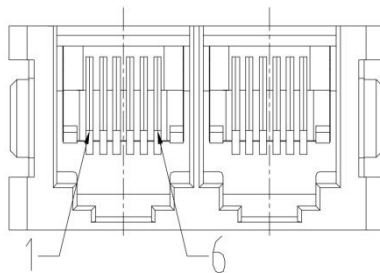Band Switch Definition

Tap Position	Definition
EXT/OFF	No output when dimming port not connect to the dimmer, Dimming enable when dimmer connected.
20%	20% $\pm$ 10% Output Current, 0-10V/PWM dimming disable
40%	40% $\pm$ 10% Output Current, 0-10V/PWM dimming disable
60%	60% $\pm$ 10% Output Current, 0-10V/PWM dimming disable
80%	80% $\pm$ 10% Output Current, 0-10V/PWM dimming disable
100%	100% $\pm$ 5% Output Current

RJ12 Interface



Pin	Definition
1, 6	12V
2, 5	0-10V
3, 4	GND

Revision History

Change Date	Rev.	Description of Change		
		Item	From	To
2021.7.29	V1.0			
2021.9.9	V1.1	Delete models with output voltage above 300V		
2021.9.26	V1.2	Update current output range		
2021.10.20	V1.3	Update Performance Curve		
		Update Mechanical Drawing		
		Delete swing line structure model		
2022.9.12	V1.4	Update company logo		
		Update Mechanical Specification		Add Tc1 and Tc2 point
		Update Performance Curve		
2023.11.7	V1.5	Net Weight/pcs	3.4kg	4kg
		Lifetime	Type: 80000Hours	Type: 50000Hours
		Operating Ambient Temperature Ta		Update note
		Update Life Vs Shell Temperature		